


# Vacuum Cups & Suction Cups



## Fittings for End-of-Arm-Tooling (EOAT) Vacuum Cups

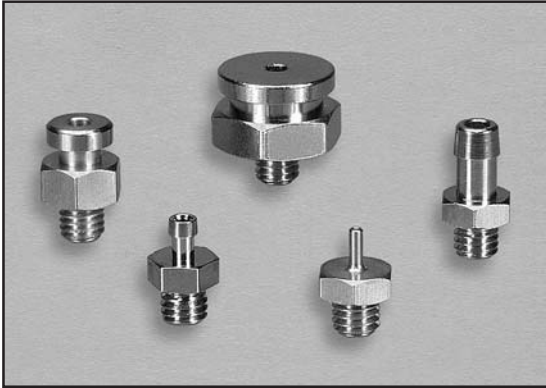

Custom electro-less nickel-plated brass fittings allow connection to a threaded pipe, tube or other fitting. The push-in design provides simple assembly and disassembly, while the flange or barb maintains a secure union. Size and style are determined by the cup. Please note that 10-32 male threads are fully compatible with M5 female threads.

Select ANVER Group 1 Fittings can also be used on ANVER EOAT Vacuum Cups. Consult factory for more information.

Product Photo	ANVER Item No.	Connection Thread Size	Overall Dia. in. (mm)	Overall Height in. (mm)
	BF1.2-OR	10-32 (5 mm) male	1/4" hex	0.42 (11)
	BF3-SHEX	10-32 (5 mm) male	1/4" hex	0.42 (11)
	BF3-OR	10-32 (5 mm) male	-	-
	BF7FL-OR	10-32 (5 mm) male	5/16" hex	0.51 (13)
	BF12FL-OR	10-32 (5 mm) male	1/2" hex	-

► This spec sheet was adapted for print from our website. Additional information and photos are available at [www.anver.com](http://www.anver.com). 8041601

36 Parmenter Road • Hudson MA 01749 USA • 978-568-0221 • 800-654-3500 • FAX 978-568-1570 • [www.anver.com](http://www.anver.com) • E-Mail: [sales@anver.com](mailto:sales@anver.com)