


### Large Vacuum Pads with Bolt-On Seals

ANVER Bolt-On Vacuum Pads feature heavy-duty steel construction with replaceable rubber seals. Excellent for handling semi-rigid to very rigid loads such as metal sheet or plate, these versatile vacuum pads have become an industry standard. A variety of mounting styles make these pads perfect for a wide range of vacuum lifting applications.

#### Features:

- Rugged Steel Construction for years of service
- Quad-Mount is standard, consult factory for other mounting options
- Seals available in Nitrile (or Neoprene) and Silicone
- Extended steel hub protects seal from damage

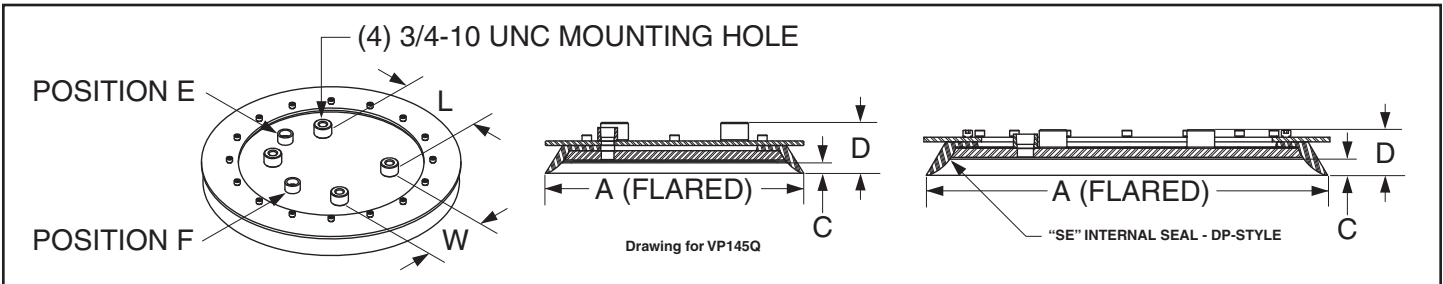

ANVER Item No.	Replacement Seal Number	Internal Seal Number	A Pad Dia. in (mm)	Mounting Pattern L x W in (mm)	C in (mm)	D in (mm)	Vacuum Port NPT	Vacuum Port Location	Weight lb (kg)	*Rated Load lb (kg)
VP145Q [76200871]	SR-145DP**	SE-145	14.50 (368)	6.5 x 4.0 (165 x 102)	0.81 (21)	2.94 (75)	1/2"	Position E	29 (13)	750 (341)
	SR-145M**	Not Needed	14.50 (368)	6.5 x 4.0 (165 x 102)	0.46 (12)	2.46 (62)	1/2"	Position E	29 (13)	750 (341)
VP155Q [76200846]	SR-155DP	SE-155	17.25 (438)	6.5 x 4.0 (165 x 102)	0.81 (21)	2.44 (62)	1/2"	Position F	38 (17)	1000 (455)
VP185Q [76200847]	SR-185DP	SE-185	18.50 (470)	8.0 x 6.0 (203 x 152)	0.81 (21)	2.44 (62)	1/2"	Position F	45 (20)	1300 (591)
VP195Q [76200827]	SR-195DP	SE-195	19.50 (495)	8.0 x 6.0 (203 x 152)	0.81 (21)	2.44 (62)	1/2"	Position F	50 (23)	1550 (705)
VP195MQ [76200946]	SR-195M**	Not Needed	19.50 (495)	8.0 x 6.0 (203 x 152)	0.81 (21)	2.44 (62)	1/2"	Position F	50 (23)	1550 (705)
VP215Q [76200035]	SR-215DP	SE-215	22.00 (559)	8.0 x 6.0 (203 x 152)	1.06 (27)	2.69 (68)	3/4"	Position E	58 (26)	2000 (909)
VP215MQ [76200948]	SR-215M**	Not Needed	22.00 (559)	8.0 x 6.0 (203 x 152)	1.06 (27)	2.69 (68)	3/4"	Position E	58 (26)	2000 (909)
VP235Q [76200034]	SR-235DP	SE-235	24.00 (610)	8.0 x 6.0 (203 x 152)	0.71 (18)	2.21 (56)	3/4"	Position F	66 (30)	2300 (1045)
VP235MQ [76200937]	SR-235M**	Not Needed	24.00 (610)	8.0 x 6.0 (203 x 152)	0.71 (18)	2.21 (56)	3/4"	Position F	66 (30)	2300 (1045)

\*NOTE: Rated load capacity at 24" Hg vacuum when used in the horizontal plane, and based on a safety factor of 2. Divide again by 2 for vertical applications. Actual capacity depends on load surface and condition of the vacuum generating system, and must be determined by the user.

\*\*NOTE: Replacement seal SR-145M does not require an internal seal. When replacing seals for VP145Q Pads on a lifter, all seals must be replaced with matching seals.